
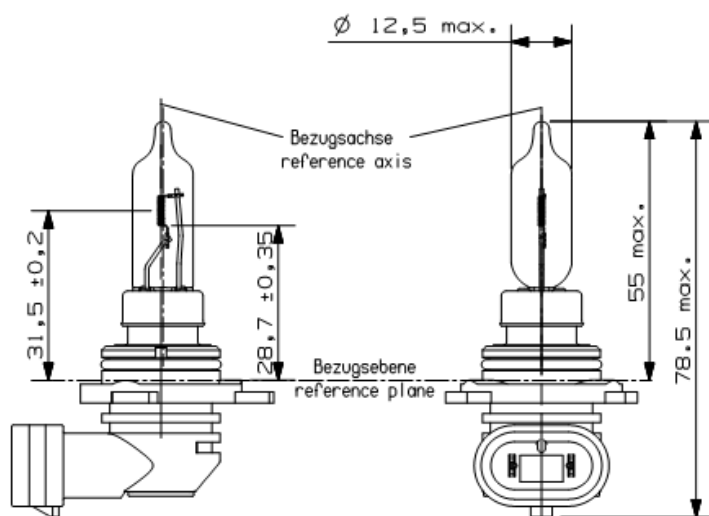


Halogen Headlamp HIR2 / 9012

	Type HIR2 12V 55W PX22d 30% more Light (+30)
	Ordering - No. 28432
Product Description	Halogen Headlamp
Features	Original Equipment Manufacturer Quality, Hardglass Up to 30% more Light on the Road
Applications	High and Low beam

Drawing (in mm)



Technical Details

Category	HIR2 / 9012	
E-homologation No.	E1 2VX	
NHTSA/FMVSS	DOT	
Rated Voltage (V)	12 / 12,8	
Wattage (W)	(at 13,2V) (at 12,8V)	max. 63 max. 60
Luminous Flux (lm)	(at 13,2V) (at 12,8V)	1875 lm ± 15 % 1700 lm ± 15 %
Life B3 (h)	(at 13,2V) (at 14,0V)	300 150
Life B10 (h)	(at 13,2V) (at 14,0V)	360 180
Life Tc (h)	(at 13,2V) (at 14,0V)	500 250
Base	PX22d	
Maximum Overall Length (mm)	max. 78,5	
Bulb Diameter (mm)	max. 12,5	
Light Center Length (mm)	31,5 ± 0,2 (DOT) 28,7 ± 0,35 (ECE)	
Burning Position	horizontal, long Electrode above Filament	
Bulk Package	200 pcs.	
Singlebox Package	100 pcs.	
Blister Package	10 pcs.	

valid from	17.06.2014—V1—PN14/0275
replace for	
file	28432.100.pdf